
KRN-SW-SUP-2420



PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports

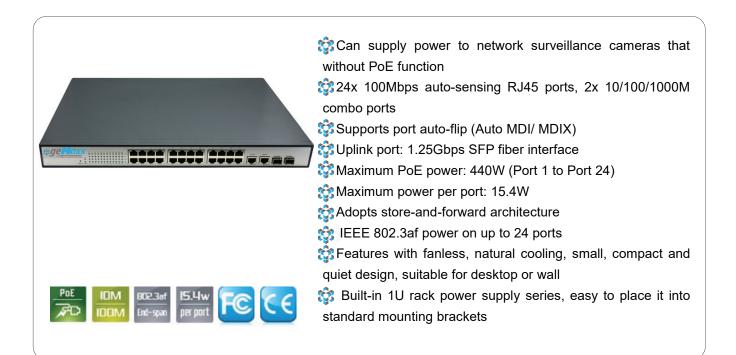

Product Description

This KRN-SW-SUP-2420 switch provides a network point for power supply and data transmission. All the 24 PoE ports can be connected with 10/100Mps quickly, and the uplink port is 1.25Gbps fiber interface, among which 1-24 ports can provide standard IEEE802.3af power supply. Due the advanced self-sensing algorithm supply power for IEEE802af terminal unit only, there is no need to worry about damaging proprietary PoE or non-PoE standard equipment. In addition, it will stop power supply when PoE devices are not connected. In short, The KRN-SW-SUP-2420 features simple and reliable design, automatic identification PoE requirements, duplex and high-speed.

This cost-effective KRN-SW-SUP-2420 provide network layout need to simplify wireless access point (AP) and IP-based surveillance cameras network cameras in order to install in commercial network and home network. The devices far away from power socket are very suitable for hanging on the wall or ceiling. PoE eliminates the need for connecting these devices to power socket. So it make more flexible for those difficult to connect with AC power socket, and cut down the installation cost. It is ideal choice for those want to deploy a small commercial network and home network that use wireless access point (AP) and IP-based surveillance cameras




PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports

Technical Specification


2

Product Name	PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports
Product Model	KRN-SW-SUP-2420
	24x 10/100M copper cable RJ45 ports(all ports support MDI/MDIX)
Connector	2x 10/100/1000M combo ports
Transfer Mode	Store-And-Forward
Transfer Mode	
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meter)
	100BASE-TX: Cat5 and more UTP(≤100 meter)
	Single mode(9/125um) optical transmission, transmission distance:
	25km(double optical default, single optical alternative)
	Bandwidth: 8.8Gbps (non-blocking)
	Network Latency (100 to 100M bps): maximum delay less than 20
Performance	microseconds
Specifications	Packet Buffer Memory: 2.75M
	Address Database Size: 1,000
	MTBF: 190,000 hours (about 21 years)
Network Protocols and Standards	IEEE 802.3i 10BASET
	IEEE 802.3u 100BASETX
	IEEE 802.3x Flow Control
	IEEE 802.1af DTE Power via MDI
	IEEE 802.3af
LEDs Status	System: power supply
	Every Port: connecting, PoE working status
	Maximum PoE power:440 W
Power	PoE port power:15.4 W(1 \sim 24 port)
FOWEI	Power input: AC100-240V 50/60Hz; (every country use a custom power plug)
Dimensions/Weight	Dimensions: 440x275x44.5mm; Weight:4.878kg
	Operating Temperature: 0 ° ~ 55 ° C
	Storage Temperature: -20 ° ~ 75 ° C
Working	Humidity: 10% ~ 90%, non-condensing
Environment	Storage Humidity: 10% ~ 95%, non-condensing
	Working Altitude: 3000 m (10,000 ft)
	Storage Altitude: 3,000 m (10,000 ft)
Radiation	CE mark, commercial
	FCC Part 15 Class B
	VCCI Class B
	EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial
	CE/LVD EN60950
Warranty	2 year warranty






PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports

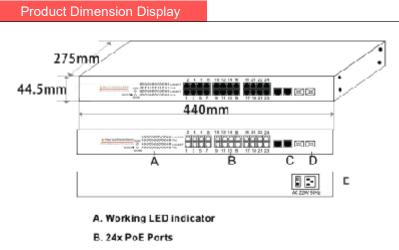

C/D. 2 Gigabit TP/SFP Combo Uplink Ports

E. 100-240VAC,50/60Hz Input



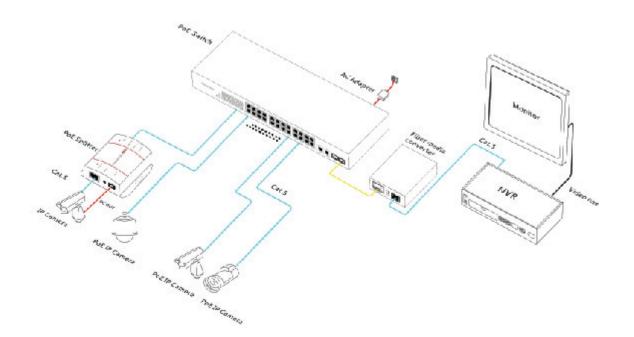

KRN-SW-SUP-2420



PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports

Product Ordering Information

Product Model: KRN-SW-SUP-2420

Product Description: 24x 10/100M Ethernet PoE ports + 2x gigabit combo ports PoE switch, and 1-24 ports supports IEEE802.3af POE international standard, each port power is15.4W, whole power is 440W.

Ordering Notes: PoE default power supply is end-span(1/2, 3/6 line pair), alternative PoE Power supply is mid-span(4/5, 7/8 line pair)

Product Packing Lists

	PoE Switch with 24 PoE Ports and 2 Gigabit Combo Ports (KRN-SW-SUP-2420) Power Cable	
Packing		
Lists	User Guide	
	Warranty Card	